
Drawer – M

Web code DQBN9A


Planning

Space requirement in cabinet

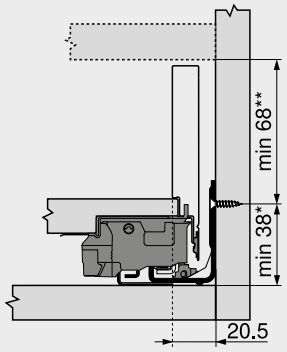


* +1 mm if cabinet profile is installed before the cabinet is assembled
** Incl. 2 mm tilt adjustment

Installation dimensions – front – screw-on




FA Front overlay
* +1 mm if cabinet profile is installed before the cabinet is assembled

Drilling distances – front – EXPANDO front



* +1 mm if cabinet profile is installed before the cabinet is assembled
** Min. 6 mm for EXPANDO T


Installation dimensions – back




Hole spacing – cabinet profiles

Cabinet profile – 750 – 40 kg
Nominal length NL (mm)

270
300 | 350
400 | 450 | 500
550 | 600

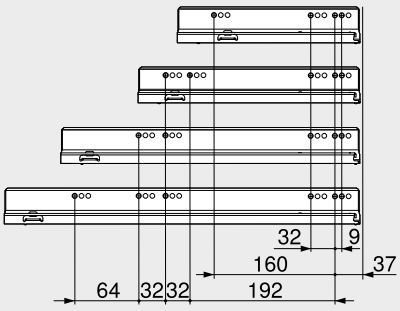


Cutting – 16 mm chipboard

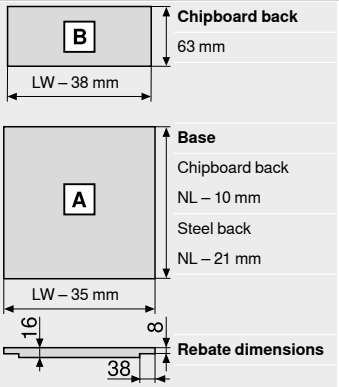

Chipboard back
63 mm

Base
Chipboard back
NL – 10 mm
Steel back
NL – 21 mm


Rebate dimensions



KB Cabinet width
LW Internal cabinet width
NL Nominal length


Cabinet profile – 753 – 70 kg
Nominal length NL (mm)

450
500 | 550 | 600
650

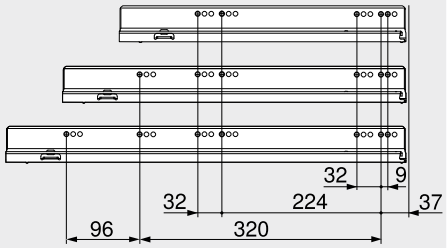

Internal cabinet depth LT min. = nominal length NL + 3 mm

Drilling distances – drawer base



Reference pages

Overview	191	CABLOXX	582	**Assembly, removal and adjustment**	
myLEGRABOX	230	Accessories	238		
Fixing system for thin fronts – EXPANDO T	584	Cabinet profile fixing positions	242		
		E-SERVICES and assembly devices	590	Short URL	
Assembly recommendation and limitation of liability – EXPANDO T	585	More technical details	698	www.blum.com/a310	
SERVO-DRIVE for LEGRABOX | MERIVOBOX | TANDEMBOX	358				
TIP-ON BLUMOTION for LEGRABOX	244				
TIP-ON for LEGRABOX	250				
AMBIA-LINE for LEGRABOX | MERIVOBOX	528				