
Drawer – M

Web code DQJ19A


Planning

Space requirement in cabinet




* +1 mm if cabinet profile is installed before the cabinet is assembled
** Incl. 2 mm tilt adjustment

Installation dimensions – front – screw-on




FA Front overlay
* +1 mm if cabinet profile is installed before the cabinet is assembled

Drilling distances – front – INSERTA | EXPANDO T front



* +1 mm if cabinet profile is installed before the cabinet is assembled
** Min. 6 mm for EXPANDO T

Installation dimensions – back




Hole spacing – cabinet profiles

Cabinet profile – 450 – 40 kg


Nominal length NL (mm)

270 | 300 | 350

400 | 450 | 500 | 550 | 600




Cutting – 16 mm chipboard



Chipboard back
83 mm

Base
Chipboard back
NL – 26 mm
Steel back
NL – 22 mm




KB Cabinet width
LW Internal cabinet width
NL Nominal length

Cabinet profile – 453 – 70 kg

Nominal length NL (mm)


450 | 500 | 550

600

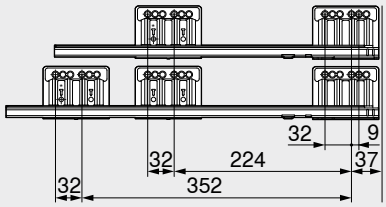

Internal cabinet depth LT min. = nominal length NL + 3 mm

Drilling distances – drawer base



NL (mm)	X (mm)
270 | 300	128
350 | 400 | 450 | 500 | 550 | 600	256

Pre-drilling possible when using a flat head screw
NL Nominal length

Reference pages

Overview	257	CABLOXX	582	**Assembly, removal and adjustment**	
Fixing system for thin fronts – EXPANDO T	584	Accessories	291		
		Cabinet profile fixing positions	295		
Assembly recommendation and limitation of liability – EXPANDO T	585	E-SERVICES and assembly devices	590	Short URL	
		More technical details	698	www.blum.com/a355	
SERVO-DRIVE for LEGRABOX | MERIVOBOX | TANDEMBOX	358				
TIP-ON BLUMOTION for MERIVOBOX	296				
AMBIA-LINE for LEGRABOX | MERIVOBOX	528				